


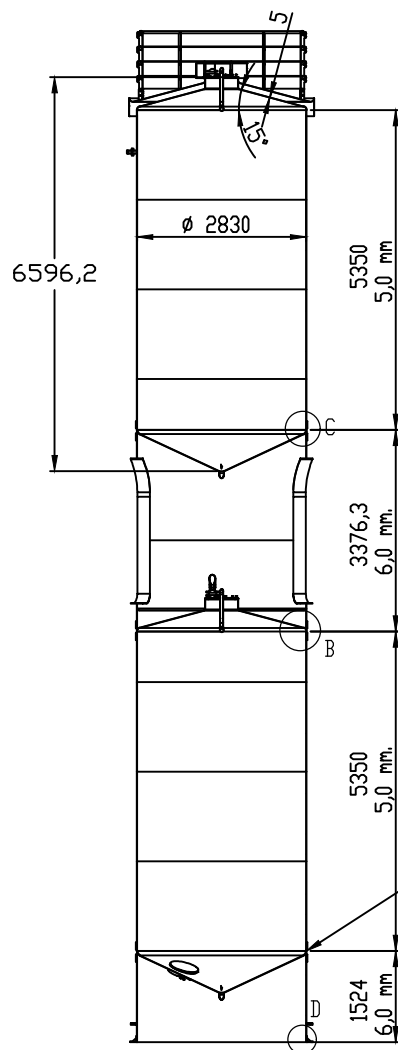
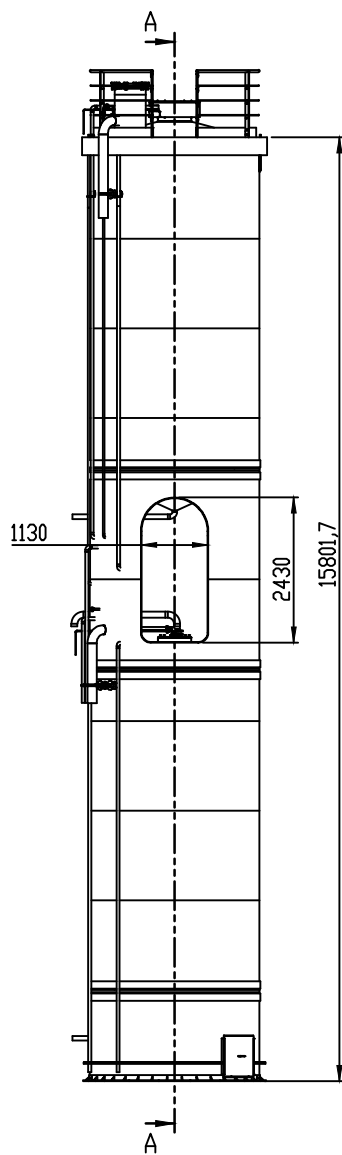





SECTION A-A



Som detalje C

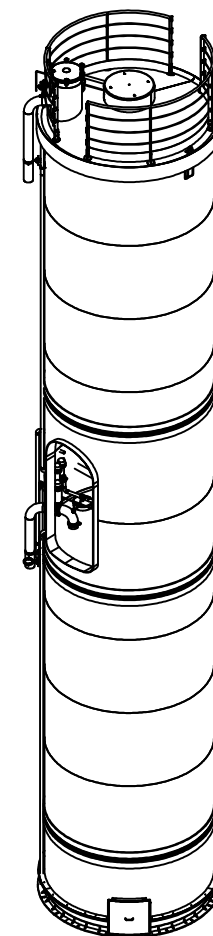

Tanke regnes med 0,15 bar vakuum.
Mellemsæktion regnes med 3 døre.
Hvor tykke og dybe skal karmene være
ved dærgennemgang?

	Category: 130100	Drawn by: PEL	Silotank 35000 L Dobbelt til olie T1	
	Material:	Drawn date: 12-03-2019	Silotank 35000 L Dobbelt til olie T1	
	Weight (kg): 9003,74	Surface:		
	General tolerance: DS/ISO 2768-1m	General welding tolerance: DS/EN ISO 13920 - B	Scale: 1:75	File no.: 13010048313
This drawing and its specifications are the property of Carsoe A / S and may not be transferred to third parties without the written consent of Carsoe A / S.			A3	Rev: A